


線位表

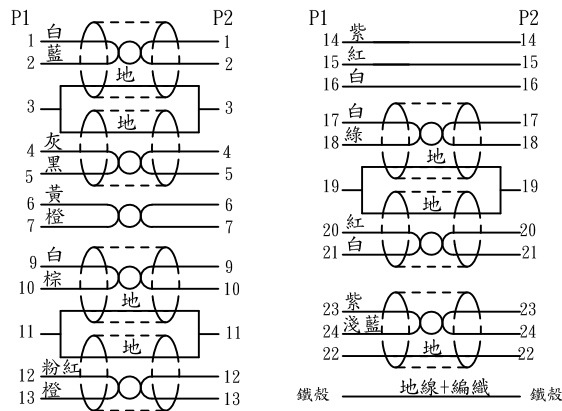


NOTE:

- 1. 100%OPEN, SHORT & MISWIRE TEST.
- 2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.				
REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-D01BK		APPROVED :							
X . +	mm					CHECKED :		TITLE :CABLE ASS' Y					
X .X +	mm					DRAWN :		SCALE : 1 : 1		SHELLT : 1 / 1		REV : 1	
X .XX +	mm					DATE :		DRAWING :		THIRD ANGLE PROJECTION			
X .XXX +	mm							FILE :					
METRIC (mm)													

NO	DESCRIPTION	MATERIAL
1	CABLE	UL/CSA 20276 (30AWG*1P+EAM)*7+30AWG*1P+30AWG*3C +AEB(AL) 85% OD:7.0mm CLR-006 BLACK ABS 500g 60°C 48H
2	CONNECTOR	DVI (24+1) MALE PBT BLACK PIN G/F
3	SHELL	DVI SHELL PLATED TIN
4	CASE SHELL	DVI 馬口鐵 一體式含後鐵殼 ID:8.5mm 材質:鐵鍍鎳
5	PVC	SHORE A 88±2 COLOR:BLACK CLR-006
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V φ2.5mm BLACK
8	DUST COVER	PE CLEAR
9	SCREW	SCREW 2.8*31.5mm#4-40 ABS MOLDED COLOR:BLACK CLR-006
10	COPPER-FOIL	W8*T0.04mm
11	CORE	B29 RH 14.2*28.5*8.0mm

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-D01BK		Arvanics Corporation.		
			REV	DESCRIPTION	DATE	APPVD.	APPROVED :	TITLE : CABLE ASS'Y			
X .	+	mm					CHECKED :	REQUIRED DOCUMENTS : *			
X .X	+	mm						SCALE : /	SHELLT:2/2	REV:1	
X .XX	+	mm					DRAWN :	DRAWING :		<small>THIRD ANGLE PROJECTION</small> 	
X .XXX	+	mm					DATE :	FILE :			
METRIC (mm)											