


線位表

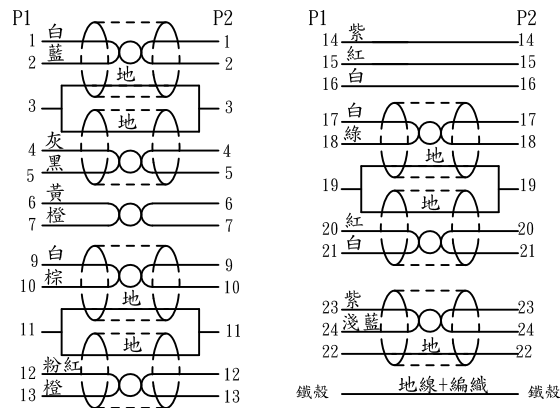


NOTE:

1. 100%OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.		
REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-D03BK	APPROVED :	TITLE :CABLE ASS'Y					
X . +	mm				CHECKED :	REQUIRED DOCUMENTS : *					
X . X +	mm				DRAWN :	SCALE : 1 : 1 SHELLT : 1 / 1 REV : 1					
X . XX +	mm				DATE :	DRAWING :					
X . XXX +	mm				FILE :	THIRD ANGLE PROJECTION					
METRIC (mm)											

NO	DESCRIPTION	MATERIAL
1	CABLE	UL/CSA 20276 (30AWG*1P+EAM)*7+30AWG*1P+30AWG*3C +AEB(AL) 85% OD:7.0mm CLR-006 BLACK ABS 500g 60°C 48H
2	CONNECTOR	DVI (24+1) MALE PBT BLACK PIN G/F
3	SHELL	DVI SHELL PLATED TIN
4	CASE SHELL	DVI 馬口鐵 一體式含後鐵殼 ID:8.5mm 材質:鐵鍍鎳
5	PVC	SHORE A 88±2 COLOR:BLACK CLR-006
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V φ2.5mm BLACK
8	DUST COVER	PE CLEAR
9	SCREW	SCREW 2.8*31.5mm#4-40 ABS MOLDED COLOR:BLACK CLR-006
10	COPPER-FOIL	W8*T0.04mm
11	CORE	B29 RH 14.2*28.5*8.0mm

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-D03BK		Arvanics Corporation.		
X .	+	mm	REV	DESCRIPTION	DATE	APPVD.	APPROVED :	TITLE : CABLE ASS'Y			
X . X	+	mm					CHECKED :	REQUIRED DOCUMENTS : *			
X . XX	+	mm						SCALE : /	SHELLT:2/2	REV:1	
X . XXX	+	mm					DRAWN :	DRAWING :		<small>THIRD ANGLE PROJECTION</small> 	
METRIC (mm)	-	mm					DATE :	FILE :			