
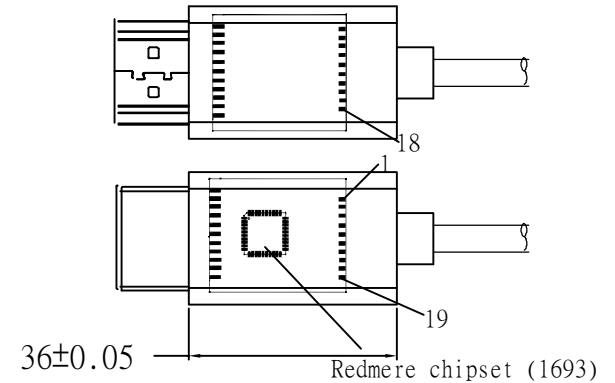


P1

30000±200MM


P2

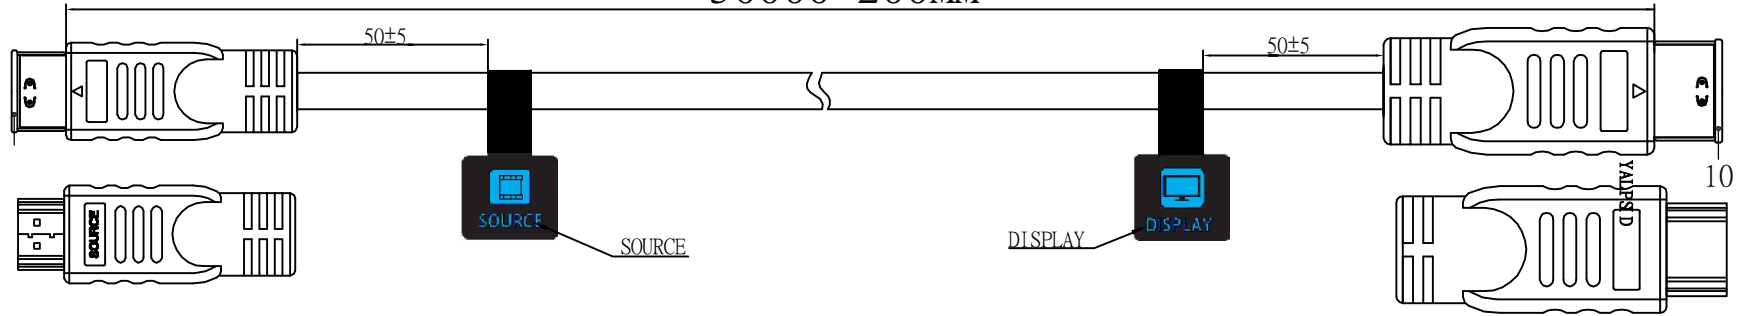

Electrical Charater:

- 1.100% Open/Short/Intermittent testing
- 2.Withstanding Voltage :DC/AC 300V AT 10MS
- 3.100% Redmere machine test
- 4.100% TV display test

Pin out :

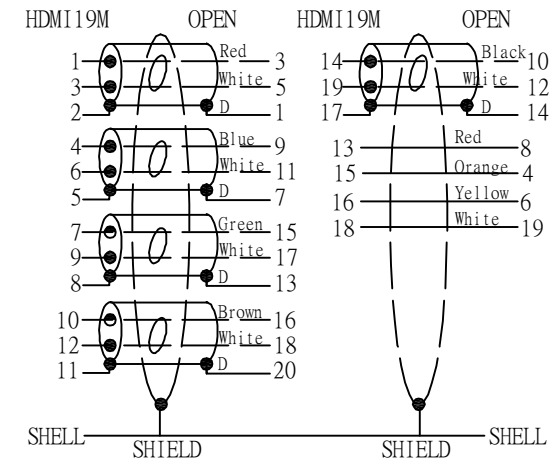

NO	DESCRIPTION	Remark
11	Carton K=K 46*30*30CM	6PCS/CARTON
10	Inner Carton K=K A3B 38.5*28.5*28.5CM	6PCS/CARTON
9	Label 2 Size 70.5*18.7mm on cable	2PCS
8	Label 1 Size 50*30mm	1PCS
7	PE BAG 05*12*16fc(0.005*30.48*40.64CM)	2PCS
6	DUST COVER LD-PE	2PCS
5	INNER MOULD LD-PE	0.012KG
4	OVERMOULD HDMI BLACK MIRRO PVC 60P TYPE	0.024KGS
3	CONN HDMI A TYPE Black insulator with Golden shell with Metal Housing	1SET
2	CHIPSET SMT Redmere Module 1693 with HDMI 19 Male Golden shell	1SET
1	CABLE UL20276 (1P*24#+AL+D+M)*5C+4C*24#+AL+D+B 黑色外被 OD10.0 216AL BRAID	30M

NOTE: Inner Mould No:LU 605H Outer Mould NO:LU605H 360 Soldering

Arvanics Corporation				
	比例:	单位:	版次:	绘图: 周阳阳 系统:
		MM.	A/O	
客户:	品名: HD24-30EQ		工程审核:	
图号:	日期:	2013/12/16	经理核准:	
			业务或客户审核:	