


# ROHS-COMPLIANT

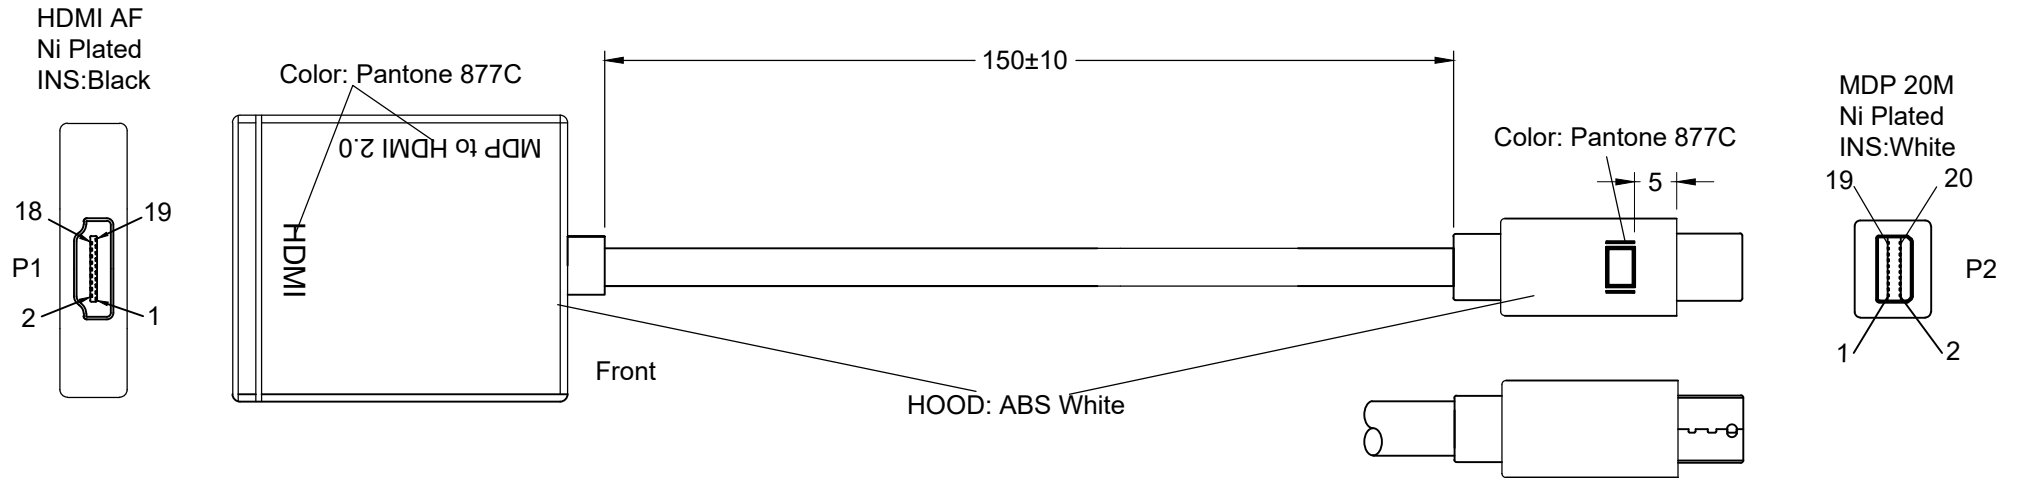


## Features: (4AMDP-H60)

1. Integrates a complete Displayport receiver and complete HDMI transmitter for video format conversion.
2. Supports DisplayPort 1, 2 and 4 lanes at 1.62 Gbps, 2.7 Gbps and 5.4 Gbps.
3. Integrates HDMI 2.0 transmitter, up to 4K\*2K@60Hz, 4K\*2K@30Hz and 1080P / 3D videos.
4. Full HDCP 1.4 / 2.2 content protection support.
5. Audio input formats: 8-ch LPCM, compressed audio (AC-3, DTS) and HBR audio format Up to 24-bit audio sample size and 192 kHz frame rate.
6. Housing Color: White.
7. Mini DP-side required sided conductive copper foil package; PCBA required sided conductive copper foil package, weaving and copper welding, the foil and steel welding.
8. PACKING: Each PC / Zip bag.


Tolerance Inch mm			Arvanics Corporation		
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
Draw			Title MDHA-0015WT		
Check			Customer P/N:		
Engr			App'd		Customer
Dwg No.		Scale	Units	Third Angle Projection	Sheet
REV:				Sheet	

# ROHS-COMPLIANT

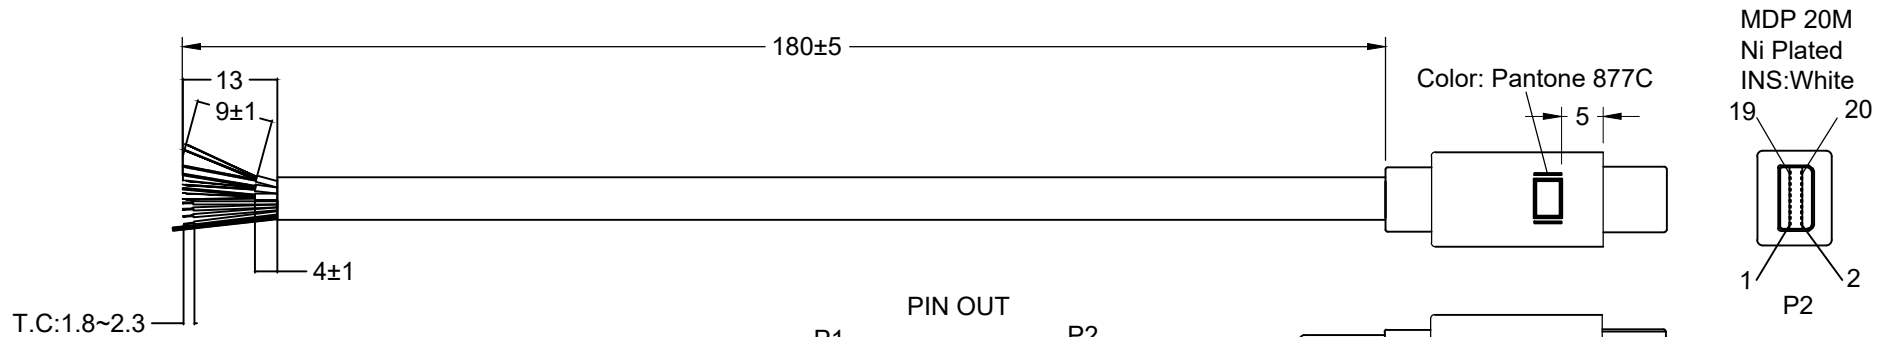


T.C.:1.8~2.3

P1 OPEN

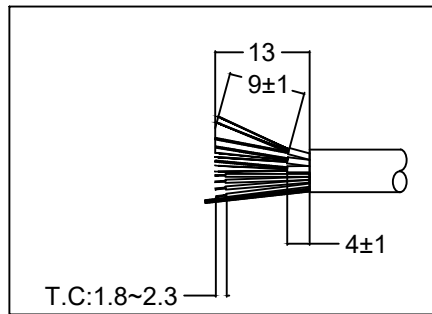

T.C.:1.8~2.3

## PIN OUT

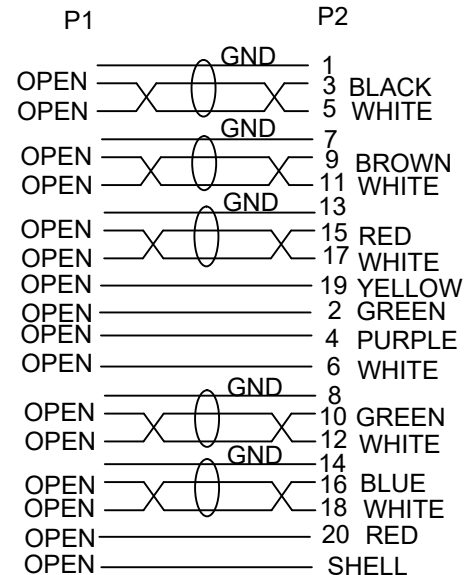

## NOTE:

- CABLE: UL20276[(32AWG+D+AL/MYLAR)\*5P  
+32AWG\*4C+28AWG\*1C+AL+D(7/0.08B.C)  
+B(16/7/0.12T.C) PVC JACKED OD: 5.0mm,Color: White.

- CONNECTOR: P2: MINI DISPLAYPORT MALE  
CONTACT: G/F SHELL: Ni-Plated.

## 3. TEST REQUEST:

- 100% OPEN SHORT & MIS-WIRE TEST.
- CONTACT RESISTANCE 3 ohm MAX .
- INSULATION RESISTANCE 10M ohm MIN .

Tolerance Inch mm		Arvanics Corporation	
.X	.015 .30	Title	
.XX	.010 .10	MDHA-0015WT	
.XXX	.005 .05	Customer P/N:	
Draw		App'd	Customer
Check		Scale	Units
Engr		Dwg No.	REV: Sheet
			Third Angle Projection